



## **FLAKE-ICE GENERATORS**

**Production from 500 to 50 000 kg / 24 h**




Geneglance S.A.S.  
9 rue des Orfèvres  
44840 Les Sorinières - FRANCE  
T : +33(0) 2 51 19 10 51 – F : +33(0)2 40 05 73 81  
[www.geneglance.com](http://www.geneglance.com) - [contact@geneglance.com](mailto:contact@geneglance.com)

# The Flake Ice Generators


Land-based models						
Water	Model	Production kg /24h	fluid	Dimensions LxWxH (CM)	Weight (Kg)	Installed power (W)
Fresh Water	F15	300 - 500 kg	R404A - C02	52x36x60	50	160
	F30	600 - 1 000 kg	R404A	65x50x70	90	250
	F90	1 600 - 3 500 kg	R404A	89x73x126	250	250
Sea Water	F90 SW	3 000 kg	R404A	90x70x126	250	305
	F200*	4 500 - 6 500 kg	R717- R404A	120x92x176	720	320
Fresh Water	F250*	7 000 - 10 000 kg	R717- R404A	130x97x205	900	320
	F600*	10 000 - 14 000 kg	R717- R404A	150x120x205	950	390
	F800*	14 000 - 20 000 kg	R717- R404A	155x155x310	2500	850
	F900*	20 000 - 30 000 kg	R717- R404A	195x195x310	3100	850
	F2000*	40 000 - 50 000 kg	R717- R404A	244x244x310	5000	1150
	On-board models					
Fresh Water	F30 M	1 000 kg	R404A	75x50x120	90	215
	F100 M	2 500 kg	R404A	90x70x160	220	305
Sea Water	F100 SW	2 700 kg	R404A	90x70x150	220	305

- Dry and subcooled ice.
- Stationary and insulated cylinder.
- Few moving parts liable to wear and tear.
- Few mechanical constraints.
- Optimum thermal exchange.
- Compatible with all modern refrigerants.
- CE and ASME Compliant.
- Manufacturing under independant survey.
- Food compatibility : *stainless steel water path for models up to 10 tons. Cleaning-in-place optional.*



\* Each ice generator is available :

- either with flood bottle (ABF version) for feeding with high pressure liquid.
- or without flood bottle (SBF version) for feeding with low pressure liquid (flooded system).

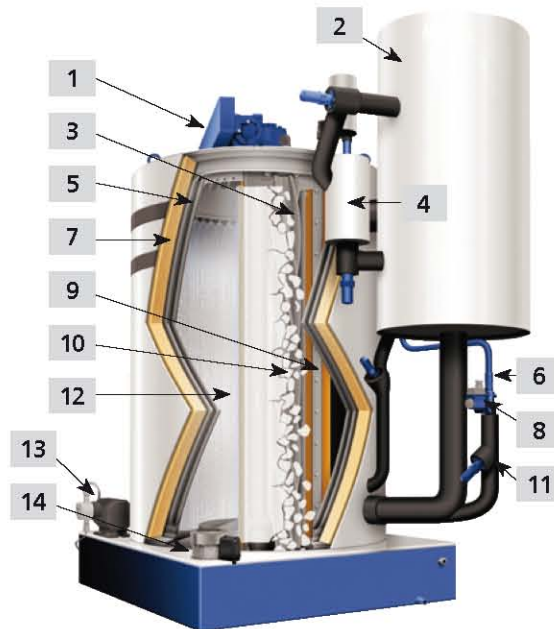

- 1 Heavy-duty gear reducer *Adjustable speed*
- 2 Flood bottle
- 3 Helical reamer *Continuous ice harvesting*
- 4 Refrigerant Liquid Level Control
- 5 Double wall stationary drum *Pressure tested at 26 bars - no sealed bearings*
- 6 HP liquid line
- 7 CFC-free insulation with PVC
- 8 Solenoid valve
- 9 Rubber wiper
- 10 Dry and sub-cooled flake-ice *Large heat-exchange surface area*
- 11 Hand-throttle valve
- 12 Evaporating surface *High-conductivity corrosion shield*
- 13 Salt dosing pump
- 14 Heavy-duty water pump